

770034 AND 770035

REGARDING FUEL PUMPS

TECHNICAL INFORMATION




GENERAL INFORMATION

The mechanical pump can be replaced with an electrically powered pump for petrol applications with a carburettor.

It is recommended to place the filter downstream of the pump.

The use of two T-connectors is recommended, following the diagram below, to avoid flooding and overflow situations from the carburettor, in vehicles without return pipe to the fuel tank.

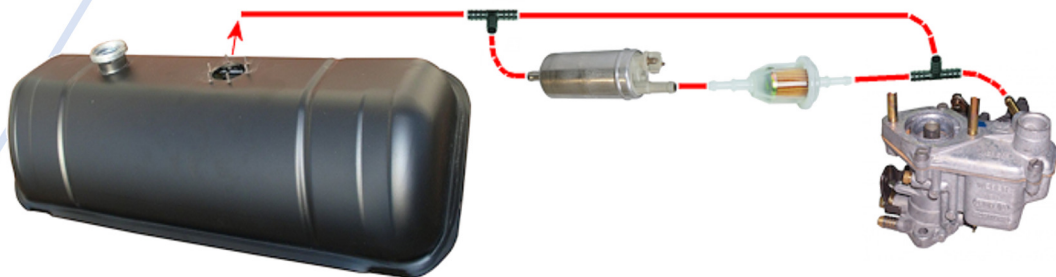

ERA Code	Pressure in bars	0.2	0.25	0.3	0.35	0.4	0.5
770034	Flow l/h	80	68	56	30	<15	
770034	Capacity V	13	13	13	13	13	
770035	Flow l/h			90	80	64	30
770035	Capacity V			13	13	13	13