

STARTER BATTERIES, TECHNICAL INFORMATION



INTRODUCTION

The replacement of the starter battery in modern vehicles involves several considerations that must be taken into account, such as resetting the Intelligent Battery Sensor (IBS) to ensure proper interaction between the new battery and the vehicle. Below are listed the three main scenarios and the corresponding learning procedures to be performed once the new battery is installed.

SCENARIO #1: The learning of the new battery occurs automatically. No additional action is required once installed into the vehicle.

Manufacturers: FCA Group, PSA, Toyota, Volvo, and others.

SCENARIO #2: The learning of the new battery must be done through diagnostic tools. The correct procedure is already available both in the Manufacturer's diagnostic systems and in the most common independent systems (Bosch, Gutmann, VCDS, Autel). It will guide the mechanic through different steps.

If the insertion of a serial code is required, the related procedure will be highlighted by the tester (depending on the situations, the insertion of 0 following the code may be required, or the creation of a specific code - Volts, Amperes, Ampere-hours as reference for the new battery).

Manufacturers: BMW, Jeep, Mazda, VAG, and others.

SCENARIO #3: The learning of the new battery must be done without the use of diagnostic tools. A specific procedure that involves pressing various buttons in a specific sequence of order and timing is listed in the technical data of both official and independent diagnostic systems.

Manufacturers: Ford and others.

WARNING:


Avoiding the battery learning procedure could affect the operation of different vehicle systems (such as the STOP&START function) and compromise the proper charging of auxiliary batteries, if present.




ERA part number: **A55090**

Technical parameter	Value
Battery	AGM Battery
ETN	550090080
Battery Capacity [Ah]	50 Ah
Cold Cranking Amps (CCA), EN [A]	800 A
Length [mm]	260
Width [mm]	173
Height [mm]	206
Layout	9
Terminals	I
Base hold-down	B07
Case size	G34
Weight [Kg]	17,50


Layout

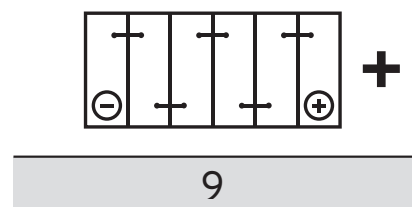

Terminals

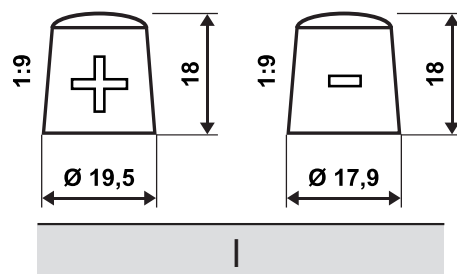

Base hold-down

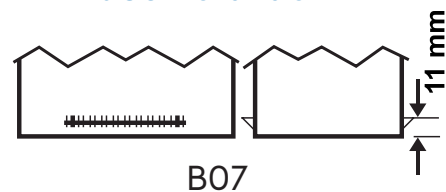





ERA part number: **A560II**

Technical parameter	Value
Battery	AGM Battery
ETN	56090I066
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	660 A
Length [mm]	242
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	L2
Weight [Kg]	17,80


Layout

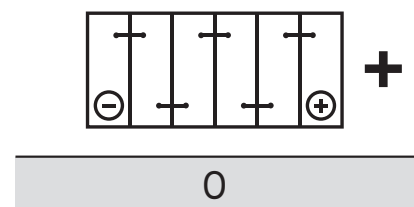

Terminals

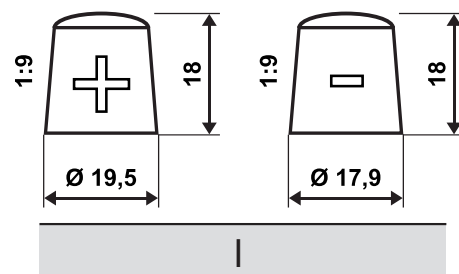

Base hold-down

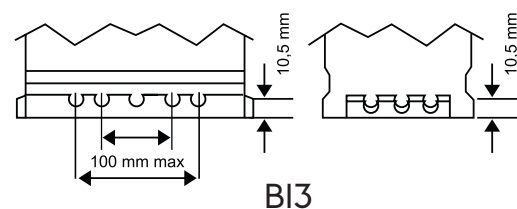





ERA part number: **A57012**

Technical parameter	Value
Battery	AGM Battery
ETN	570901072
Battery Capacity [Ah]	70 Ah
Cold Cranking Amps (CCA), EN [A]	720 A
Length [mm]	278
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H6/LN3
Weight [Kg]	20,66


Layout

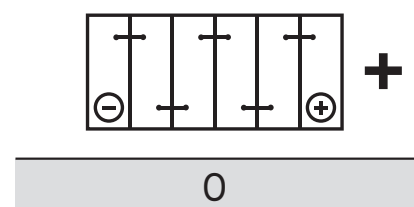

Terminals

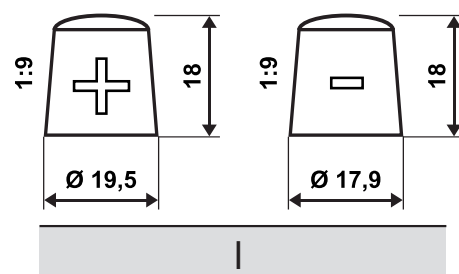

Base hold-down

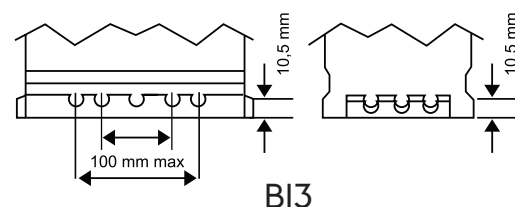





ERA part number: A58013

Technical parameter	Value
Battery	AGM Battery
ETN	580901076
Battery Capacity [Ah]	80 Ah
Cold Cranking Amps (CCA), EN [A]	760 A
Length [mm]	315
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H7/LN4
Weight [Kg]	23,39


Layout

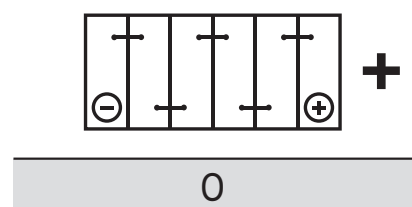

Terminals

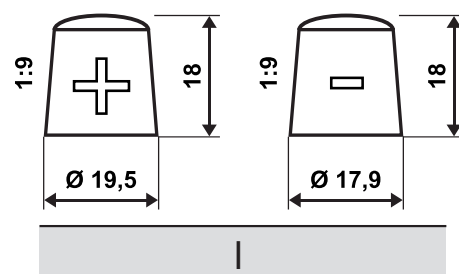

Base hold-down

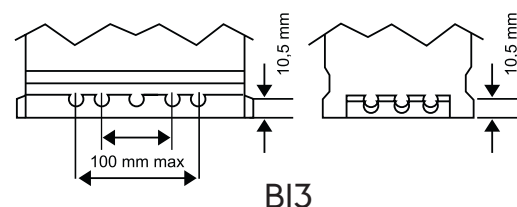





ERA part number: **A59514**

Technical parameter	Value
Battery	AGM Battery
ETN	59590I08I
Battery Capacity [Ah]	95 Ah
Cold Cranking Amps (CCA), EN [A]	810 A
Length [mm]	353
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	L5
Weight [Kg]	25,90


Layout

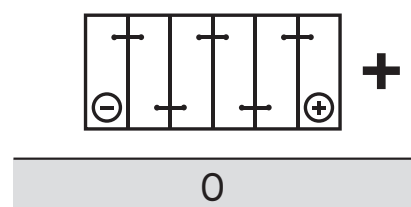

Terminals

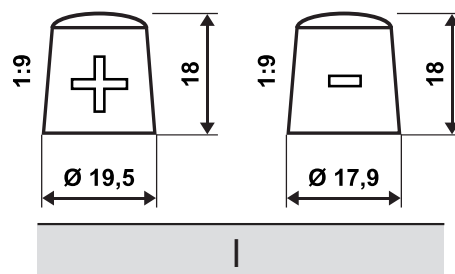

Base hold-down

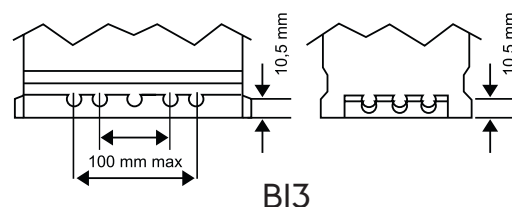





ERA part number: A60515

Technical parameter	Value
Battery	AGM Battery
ETN	605901091
Battery Capacity [Ah]	105 Ah
Cold Cranking Amps (CCA), EN [A]	910 A
Length [mm]	394
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	L6
Weight [Kg]	29,00


Layout

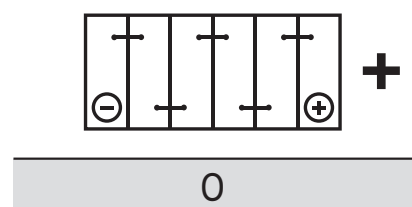

Terminals

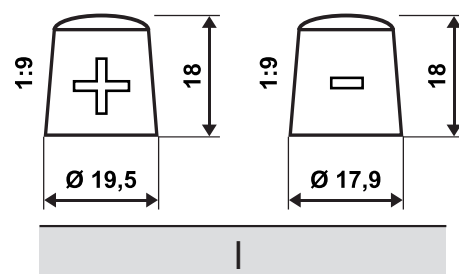

Base hold-down

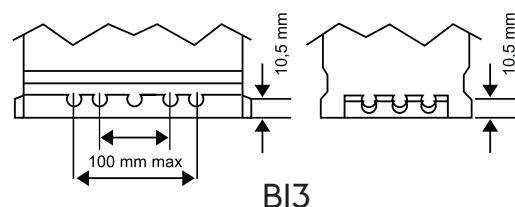





ERA part number: **E550II**

Technical parameter	Value
Battery	EFB Battery
ETN	5500II048
Battery Capacity [Ah]	55 Ah
Cold Cranking Amps (CCA), EN [A]	480 A
Length [mm]	207
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	LOI
Weight [Kg]	13,90


Layout

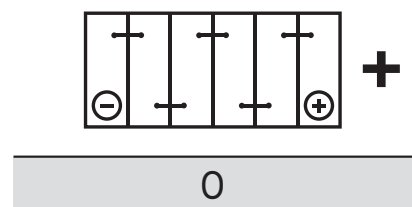

Terminals

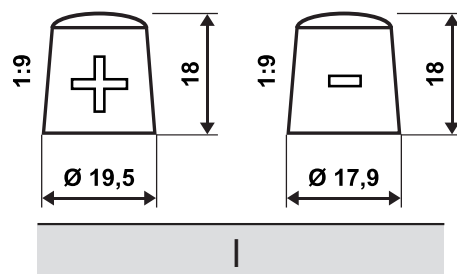

Base hold-down

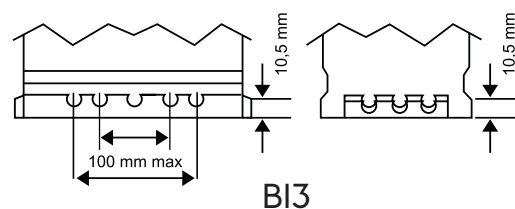





ERA part number: E56010

Technical parameter	Value
Battery	EFB Battery
ETN	560010052
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	520 A
Length [mm]	230
Width [mm]	173
Height [mm]	222
Layout	0
Terminals	I
Base hold-down	B00
Case size	D23
Weight [Kg]	16,20


Layout

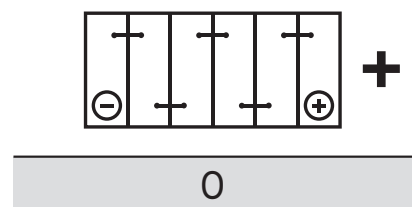

Terminals

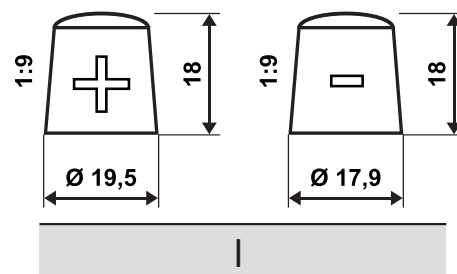

Base hold-down

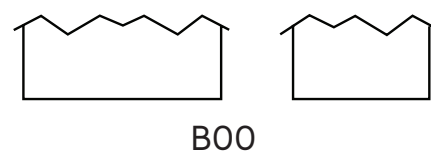





ERA part number: E560II

Technical parameter	Value
Battery	EFB Battery
ETN	560500064
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	640 A
Length [mm]	242
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H5/LN2
Weight [Kg]	16,12


Layout

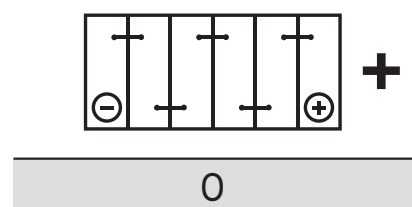

Terminals

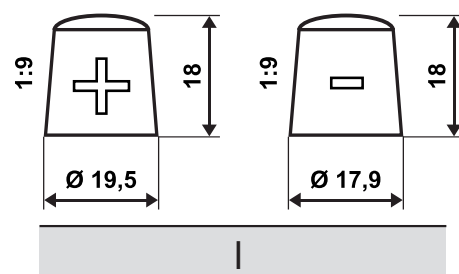

Base hold-down

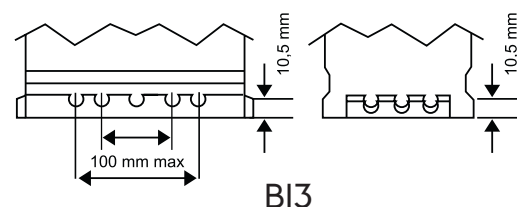





ERA part number: E56512

Technical parameter	Value
Battery	EFB Battery
ETN	565500065
Battery Capacity [Ah]	65 Ah
Cold Cranking Amps (CCA), EN [A]	650 A
Length [mm]	278
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T6/LB3
Weight [Kg]	17,32


Layout

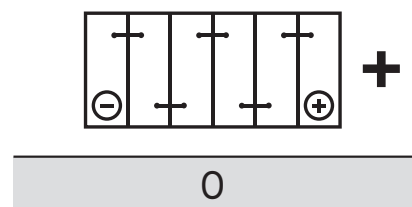

Terminals

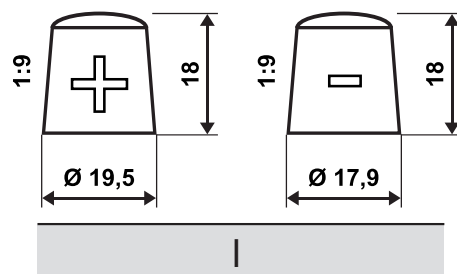

Base hold-down

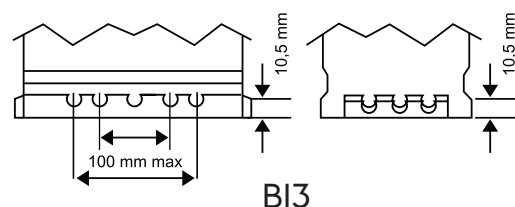





ERA part number: E565II

Technical parameter	Value
Battery	EFB Battery
ETN	565502065
Battery Capacity [Ah]	65 Ah
Cold Cranking Amps (CCA), EN [A]	650 A
Length [mm]	232
Width [mm]	173
Height [mm]	225
Layout	0
Terminals	I
Base hold-down	B00
Case size	D23
Weight [Kg]	16,67


Layout

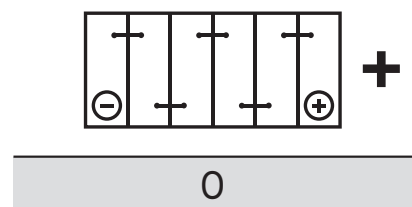

Terminals

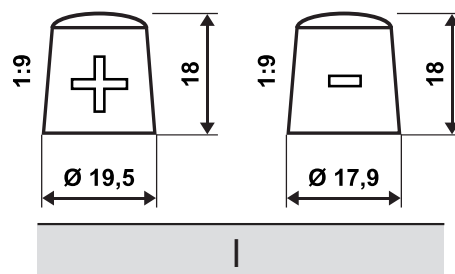

Base hold-down

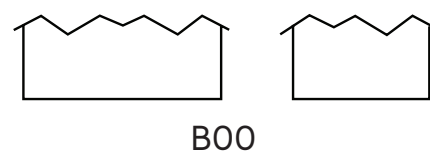





ERA part number: E57013

Technical parameter	Value
Battery	EFB Battery
ETN	570500070
Battery Capacity [Ah]	70 Ah
Cold Cranking Amps (CCA), EN [A]	700 A
Length [mm]	278
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H6/LN3
Weight [Kg]	18,64


Layout

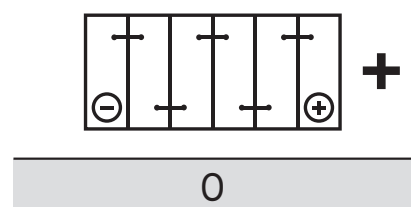

Terminals

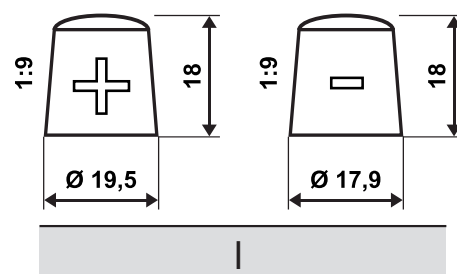

Base hold-down

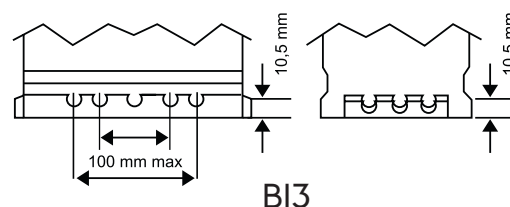





ERA part number: E57210

Technical parameter	Value
Battery	EFB Battery
ETN	572502076
Battery Capacity [Ah]	72 Ah
Cold Cranking Amps (CCA), EN [A]	760 A
Length [mm]	261
Width [mm]	175
Height [mm]	220
Layout	0
Terminals	I
Base hold-down	B0I
Case size	D26
Weight [Kg]	18,85


Layout

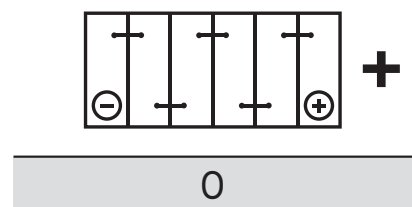

Terminals

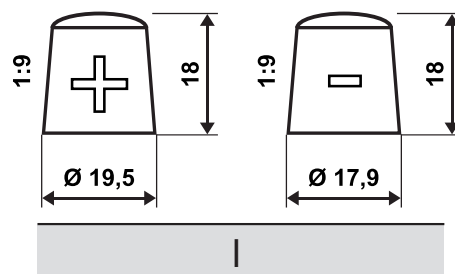

Base hold-down

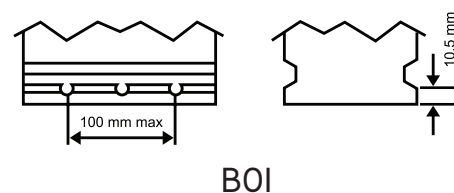





ERA part number: E57514

Technical parameter	Value
Battery	EFB Battery
ETN	575500073
Battery Capacity [Ah]	75 Ah
Cold Cranking Amps (CCA), EN [A]	730 A
Length [mm]	315
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T7/LB4
Weight [Kg]	19,41


Layout

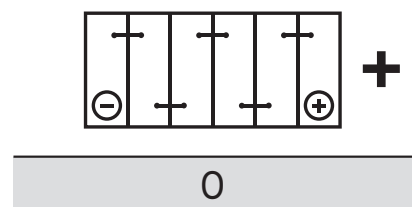

Terminals

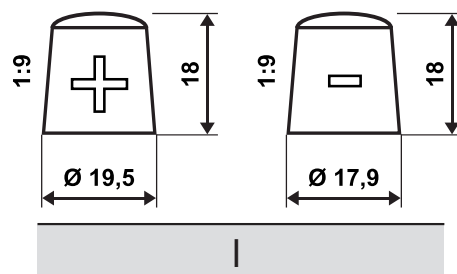

Base hold-down

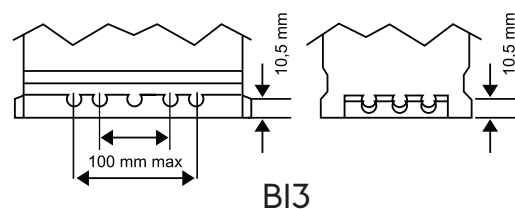





ERA part number: E58015

Technical parameter	Value
Battery	EFB Battery
ETN	580500073
Battery Capacity [Ah]	75 Ah
Cold Cranking Amps (CCA), EN [A]	730 A
Length [mm]	315
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T7/LN4
Weight [Kg]	20,92


Layout

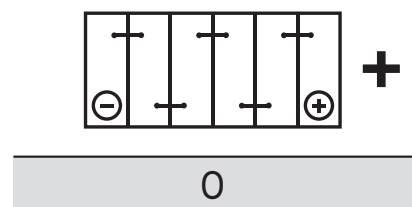

Terminals

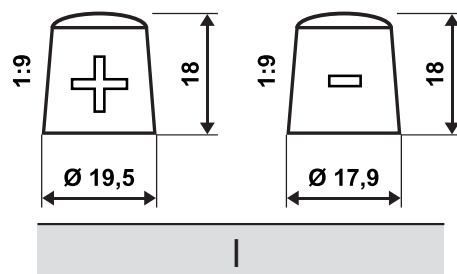

Base hold-down

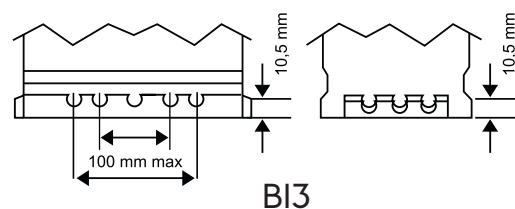





ERA part number: E58510

Technical parameter	Value
Battery	EFB Battery
ETN	585502080
Battery Capacity [Ah]	85 Ah
Cold Cranking Amps (CCA), EN [A]	800 A
Length [mm]	306
Width [mm]	173
Height [mm]	225
Layout	0
Terminals	I
Base hold-down	B0I
Case size	D3I
Weight [Kg]	21,40


Layout

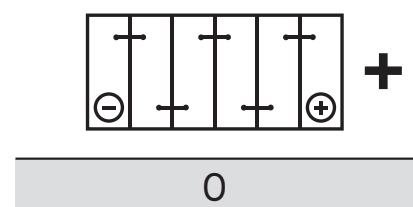

Terminals

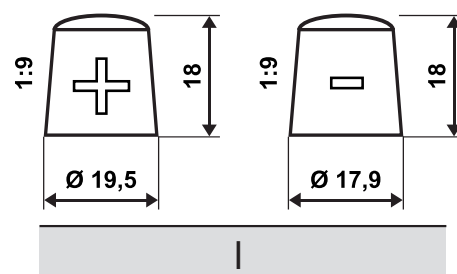

Base hold-down

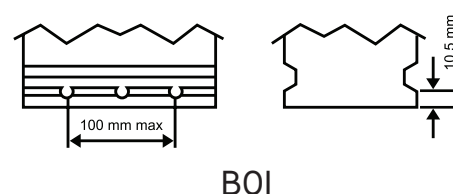





ERA part number: E595II

Technical parameter	Value
Battery	EFB Battery
ETN	595500085
Battery Capacity [Ah]	95 Ah
Cold Cranking Amps (CCA), EN [A]	850 A
Length [mm]	353
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H8/L5
Weight [Kg]	23,52


Layout

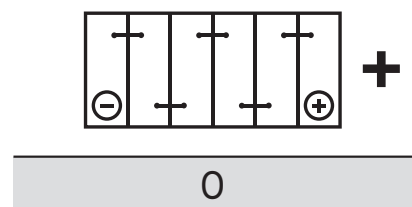

Terminals

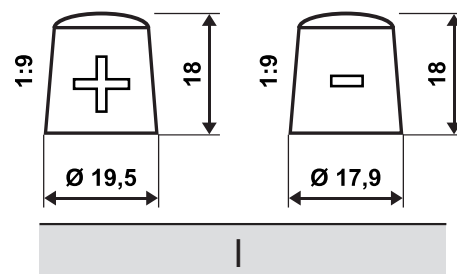

Base hold-down

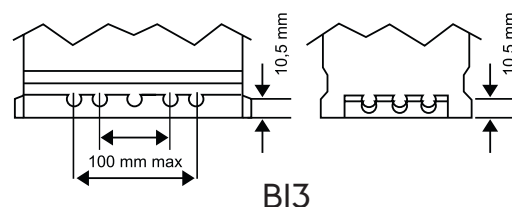





ERA part number: E60510

Technical parameter	Value
Battery	EFB Battery
ETN	6050I0095
Battery Capacity [Ah]	105 Ah
Cold Cranking Amps (CCA), EN [A]	950 A
Length [mm]	392
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	L06
Weight [Kg]	27,20


Layout

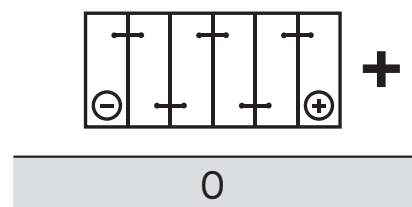

Terminals

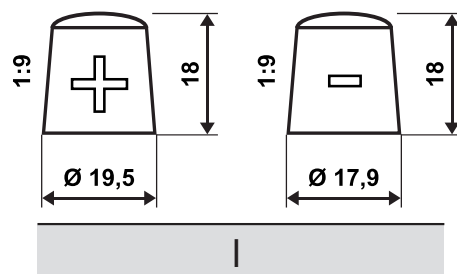

Base hold-down

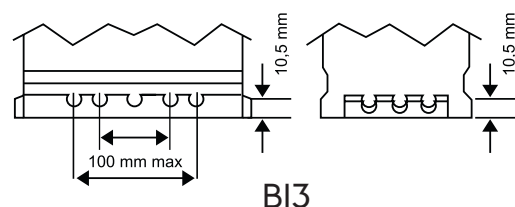





ERA part number: S53523

Technical parameter	Value
Battery	SLI Battery
ETN	535117030
Battery Capacity [Ah]	35 Ah
Cold Cranking Amps (CCA), EN [A]	300 A
Length [mm]	187
Width [mm]	140
Height [mm]	227
Layout	0
Terminals	3
Base hold-down	B01
Case size	B19
Weight [Kg]	9,31


Layout

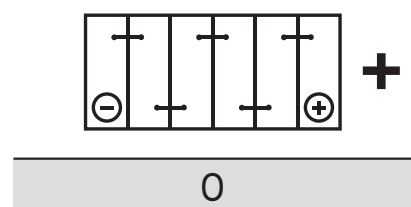

Terminals

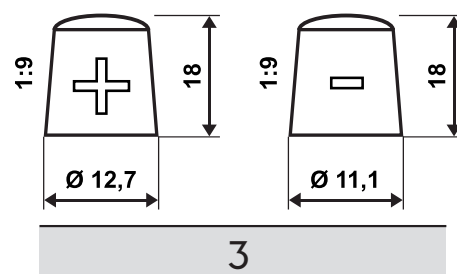

Base hold-down

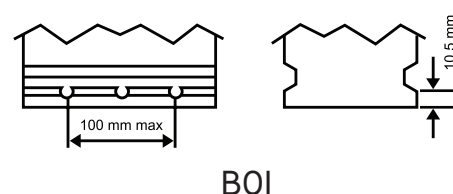





ERA part number: S53522

Technical parameter	Value
Battery	SLI Battery
ETN	535II8030
Battery Capacity [Ah]	35 Ah
Cold Cranking Amps (CCA), EN [A]	300 A
Length [mm]	187
Width [mm]	127
Height [mm]	227
Layout	0
Terminals	3
Base hold-down	B00
Case size	BI9
Weight [Kg]	9,31


Layout

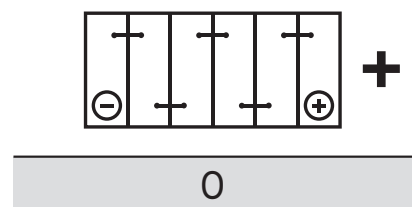

Terminals

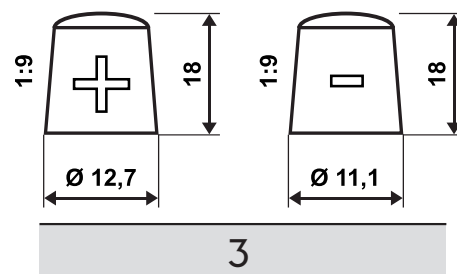

Base hold-down

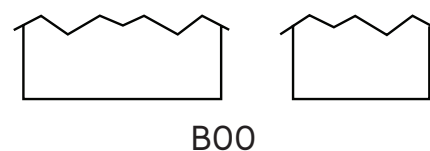





ERA part number: S5354I

Technical parameter	Value
Battery	SLI Battery
ETN	535II9030
Battery Capacity [Ah]	35 Ah
Cold Cranking Amps (CCA), EN [A]	300 A
Length [mm]	187
Width [mm]	127
Height [mm]	227
Layout	I
Terminals	3
Base hold-down	B00
Case size	BI9
Weight [Kg]	9,3I


Layout

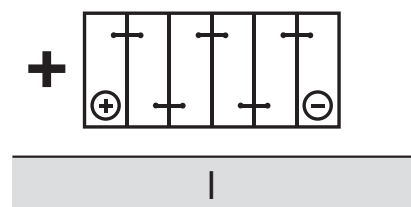

Terminals

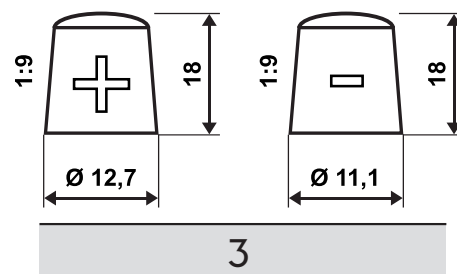

Base hold-down







ERA part number: S54012

Technical parameter	Value
Battery	SLI Battery
ETN	540406034
Battery Capacity [Ah]	40 Ah
Cold Cranking Amps (CCA), EN [A]	340 A
Length [mm]	175
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	L0
Weight [Kg]	10,10


Layout

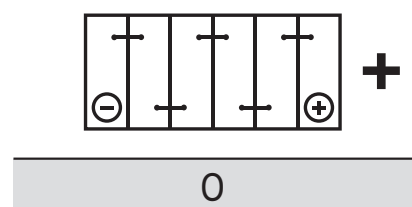

Terminals

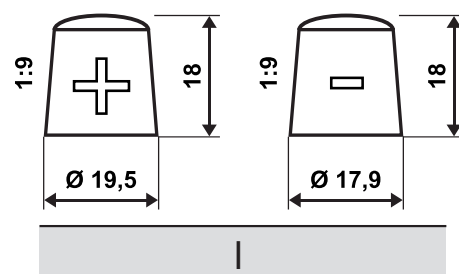

Base hold-down

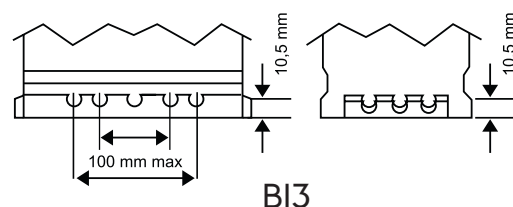





ERA part number: S54013

Technical parameter	Value
Battery	SLI Battery
ETN	540400036
Battery Capacity [Ah]	40 Ah
Cold Cranking Amps (CCA), EN [A]	360 A
Length [mm]	207
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T4/LBI
Weight [Kg]	10,56


Layout

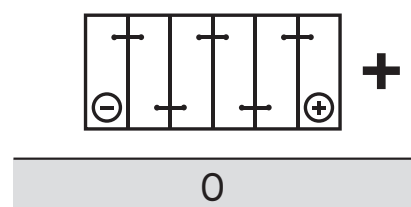

Terminals

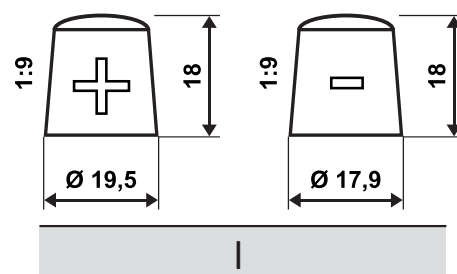

Base hold-down

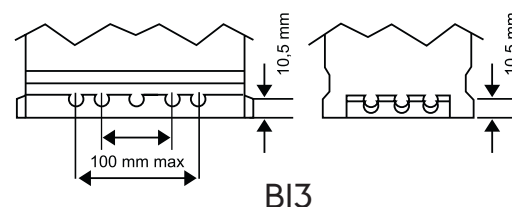





ERA part number: S54214

Technical parameter	Value
Battery	SLI Battery
ETN	542400039
Battery Capacity [Ah]	42 Ah
Cold Cranking Amps (CCA), EN [A]	390 A
Length [mm]	175
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	L0
Weight [Kg]	10,70


Layout

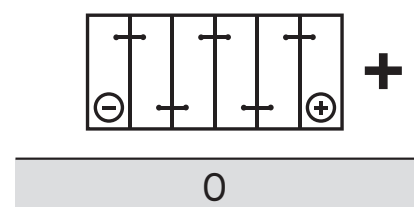

Terminals

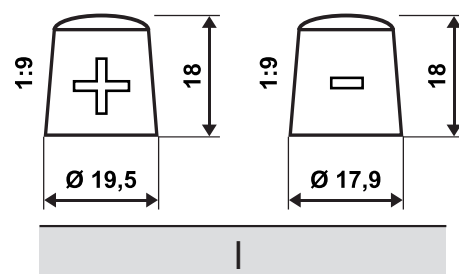

Base hold-down

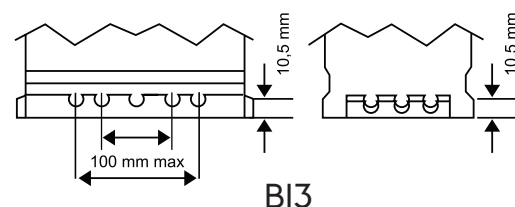





ERA part number: S54410

Technical parameter	Value
Battery	SLI Battery
ETN	544010040
Battery Capacity [Ah]	44 Ah
Cold Cranking Amps (CCA), EN [A]	400 A
Length [mm]	175
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	L0
Weight [Kg]	10,70


Layout

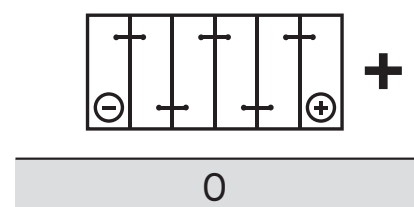

Terminals

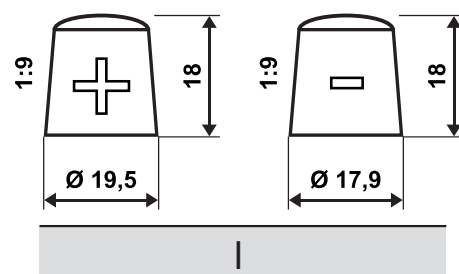

Base hold-down

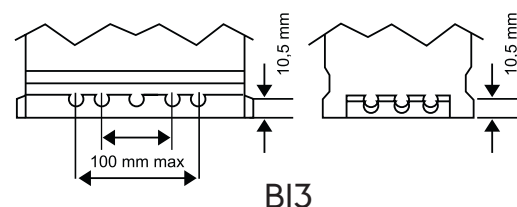





ERA part number: S544I4

Technical parameter	Value
Battery	SLI Battery
ETN	544402044
Battery Capacity [Ah]	44 Ah
Cold Cranking Amps (CCA), EN [A]	440 A
Length [mm]	207
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T4/LBI
Weight [Kg]	11,78


Layout

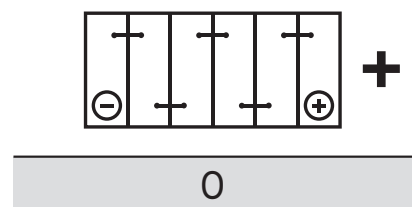

Terminals

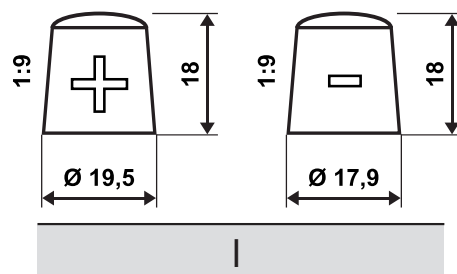

Base hold-down

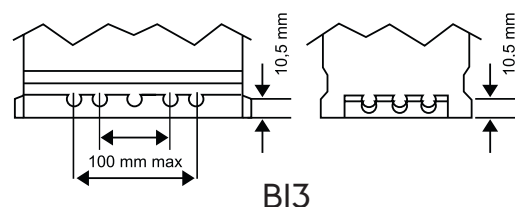





ERA part number: S5452I

Technical parameter	Value
Battery	SLI Battery
ETN	545I55033
Battery Capacity [Ah]	45 Ah
Cold Cranking Amps (CCA), EN [A]	330 A
Length [mm]	237
Width [mm]	128
Height [mm]	225
Layout	0
Terminals	3
Base hold-down	B00
Case size	B24
Weight [Kg]	12,60


Layout

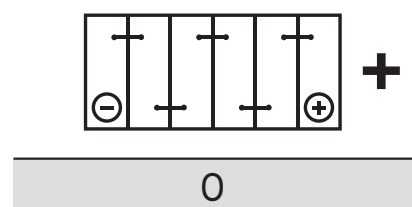

Terminals

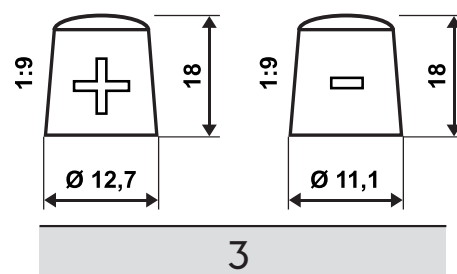

Base hold-down

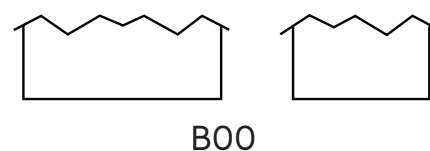





ERA part number: S54549

Technical parameter	Value
Battery	SLI Battery
ETN	545157033
Battery Capacity [Ah]	45 Ah
Cold Cranking Amps (CCA), EN [A]	330 A
Length [mm]	237
Width [mm]	128
Height [mm]	225
Layout	I
Terminals	3
Base hold-down	B00
Case size	B24
Weight [Kg]	12,60


Layout

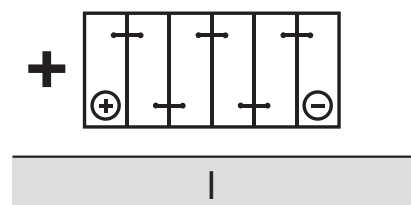

Terminals

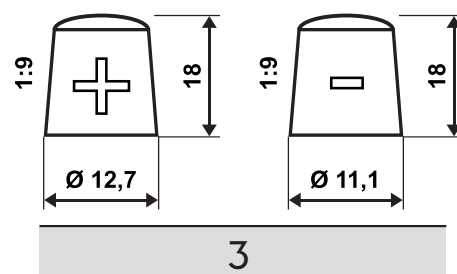

Base hold-down

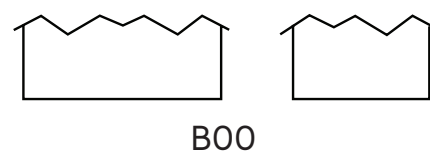





ERA part number: S545I5

Technical parameter	Value
Battery	SLI Battery
ETN	5454I2040
Battery Capacity [Ah]	45 Ah
Cold Cranking Amps (CCA), EN [A]	400 A
Length [mm]	207
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H4/LI
Weight [Kg]	11,96


Layout

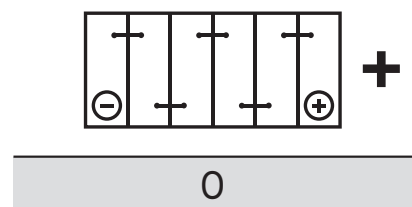

Terminals

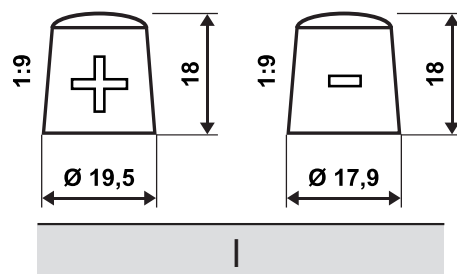

Base hold-down

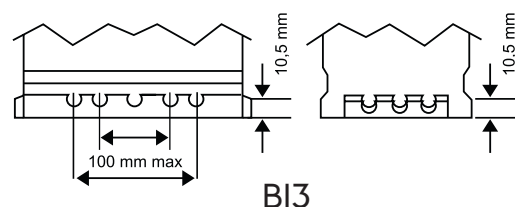





ERA part number: **S54506**

Technical parameter	Value
Battery	SLI Battery
ETN	5454I3040
Battery Capacity [Ah]	45 Ah
Cold Cranking Amps (CCA), EN [A]	400 A
Length [mm]	207
Width [mm]	175
Height [mm]	190
Layout	I
Terminals	I
Base hold-down	BI3
Case size	H4
Weight [Kg]	11,57


Layout

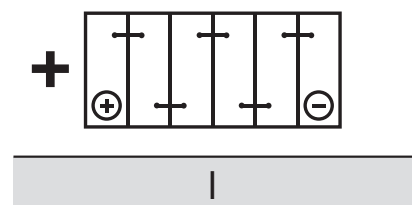

Terminals

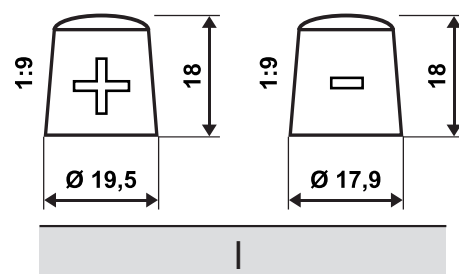

Base hold-down

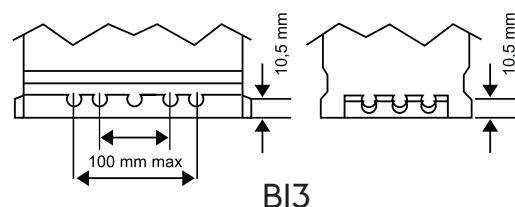





ERA part number: S54517

Technical parameter	Value
Battery	SLI Battery
ETN	545156033
Battery Capacity [Ah]	45 Ah
Cold Cranking Amps (CCA), EN [A]	330 A
Length [mm]	238
Width [mm]	129
Height [mm]	227
Layout	0
Terminals	I
Base hold-down	B00
Case size	B24
Weight [Kg]	11,35


Layout

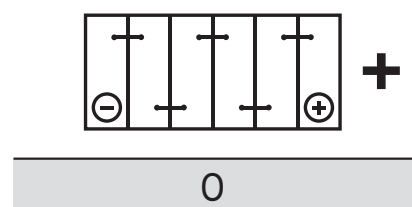

Terminals

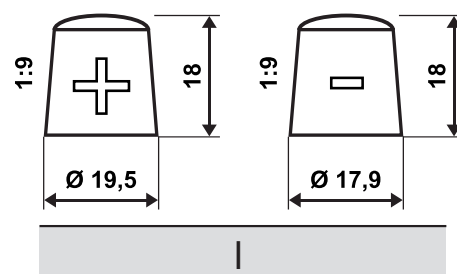

Base hold-down

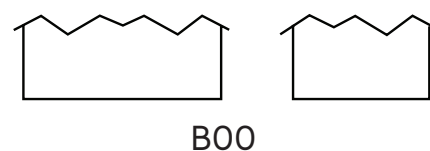





ERA part number: S54508

Technical parameter	Value
Battery	SLI Battery
ETN	545158033
Battery Capacity [Ah]	45 Ah
Cold Cranking Amps (CCA), EN [A]	330 A
Length [mm]	238
Width [mm]	129
Height [mm]	227
Layout	I
Terminals	I
Base hold-down	B00
Case size	B24
Weight [Kg]	11,35


Layout

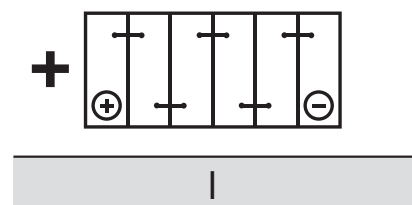

Terminals

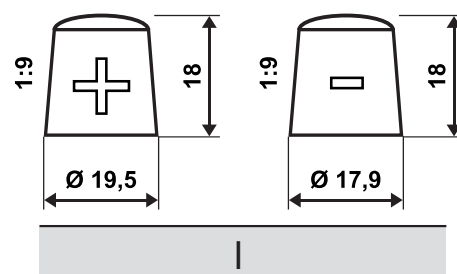

Base hold-down

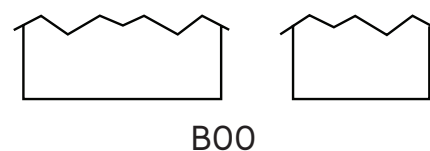





ERA part number: S550I2

Technical parameter	Value
Battery	SLI Battery
ETN	5500I2036
Battery Capacity [Ah]	50 Ah
Cold Cranking Amps (CCA), EN [A]	360 A
Length [mm]	200
Width [mm]	173
Height [mm]	222
Layout	0
Terminals	I
Base hold-down	Korean B0I
Case size	D20
Weight [Kg]	13,00


Layout

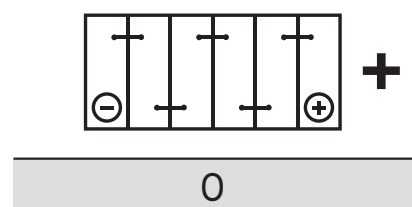

Terminals

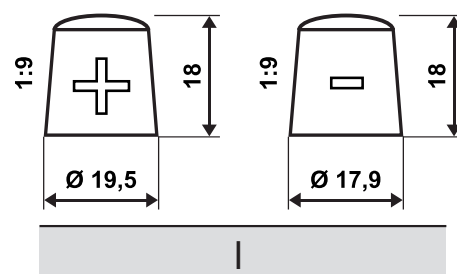

Base hold-down

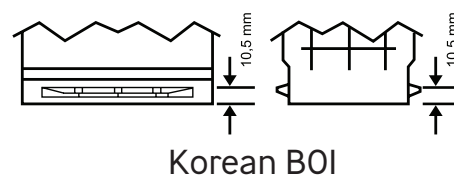





ERA part number: **S552II**

Technical parameter	Value
Battery	SLI Battery
ETN	552400047
Battery Capacity [Ah]	52 Ah
Cold Cranking Amps (CCA), EN [A]	470 A
Length [mm]	207
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H4
Weight [Kg]	12,14


Layout

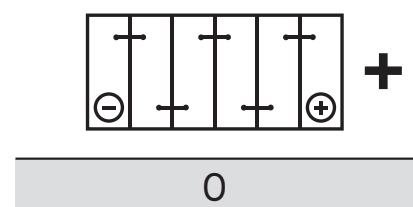

Terminals

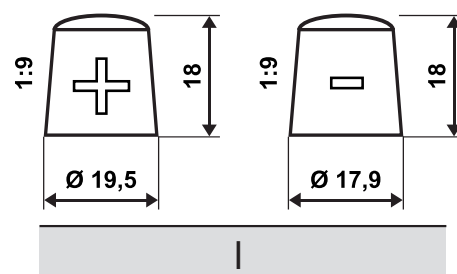

Base hold-down

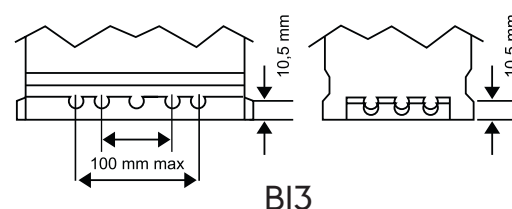





ERA part number: S553I2

Technical parameter	Value
Battery	SLI Battery
ETN	553400047
Battery Capacity [Ah]	53 Ah
Cold Cranking Amps (CCA), EN [A]	470 A
Length [mm]	242
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T5/LB2
Weight [Kg]	13,42


Layout

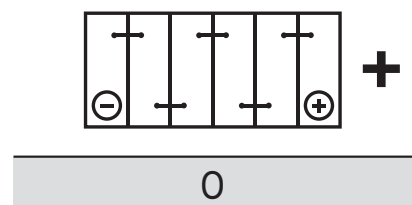

Terminals

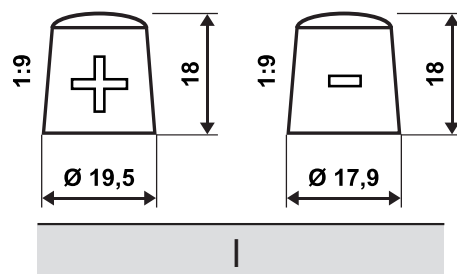

Base hold-down

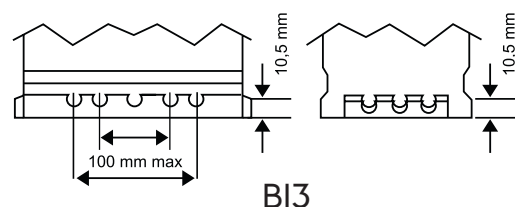





ERA part number: **S556I3**

Technical parameter	Value
Battery	SLI Battery
ETN	556400048
Battery Capacity [Ah]	56 Ah
Cold Cranking Amps (CCA), EN [A]	480 A
Length [mm]	242
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H5
Weight [Kg]	13,44


Layout

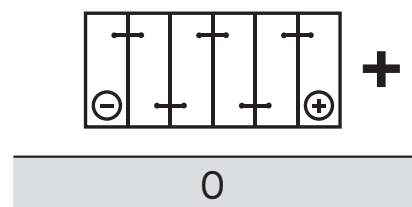

Terminals

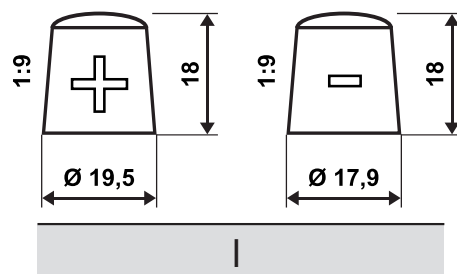

Base hold-down

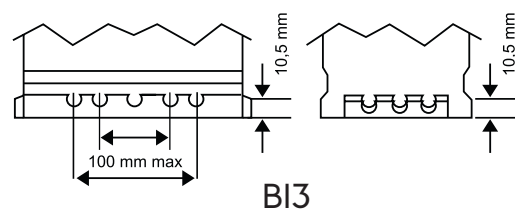





ERA part number: S56010

Technical parameter	Value
Battery	SLI Battery
ETN	560010048
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	480 A
Length [mm]	230
Width [mm]	172
Height [mm]	222
Layout	0
Terminals	I
Base hold-down	Korean B0I
Case size	D23
Weight [Kg]	14,68


Layout

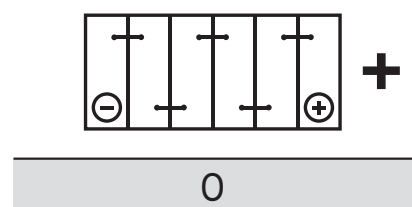

Terminals

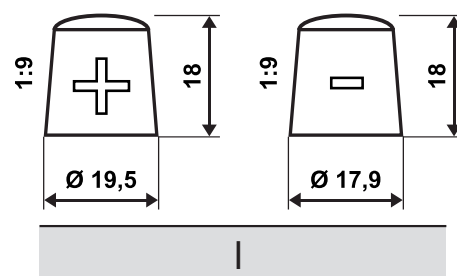

Base hold-down

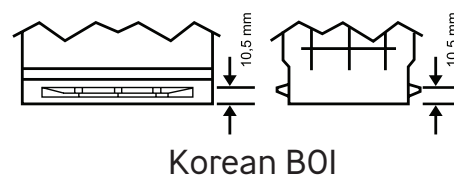





ERA part number: S56017

Technical parameter	Value
Battery	SLI Battery
ETN	560408054
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	540 A
Length [mm]	242
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H5/LN2
Weight [Kg]	14,72


Layout

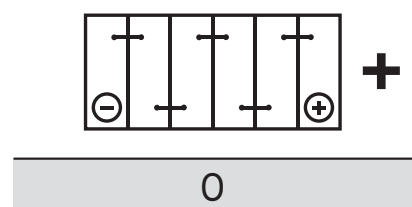

Terminals

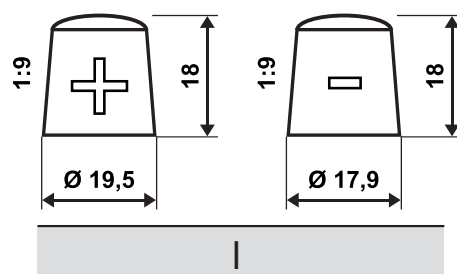

Base hold-down

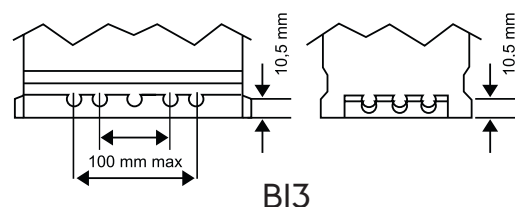





ERA part number: S56016

Technical parameter	Value
Battery	SLI Battery
ETN	560409054
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	540 A
Length [mm]	242
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T5
Weight [Kg]	13,83


Layout

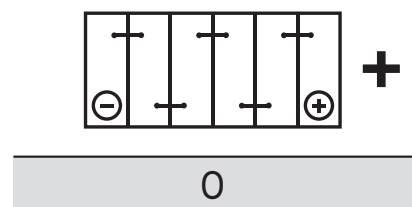

Terminals

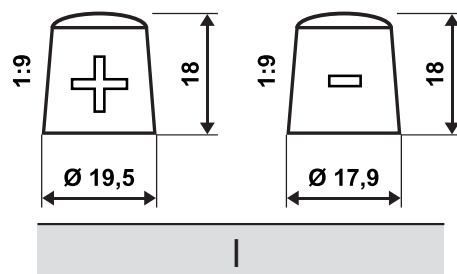

Base hold-down

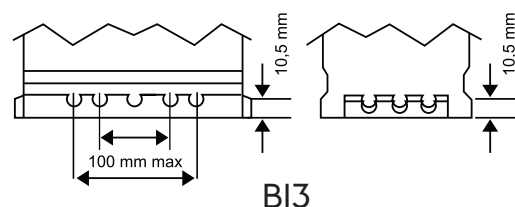





ERA part number: S560I4

Technical parameter	Value
Battery	SLI Battery
ETN	5604I205I
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	510 A
Length [mm]	232
Width [mm]	173
Height [mm]	225
Layout	0
Terminals	I
Base hold-down	B00
Case size	D23
Weight [Kg]	14,05


Layout

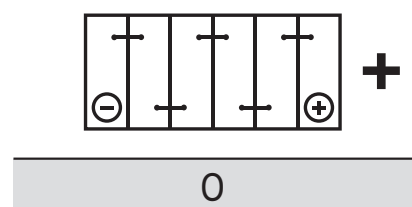

Terminals

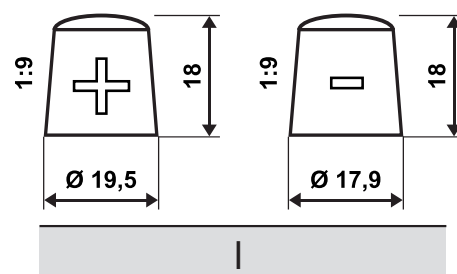

Base hold-down

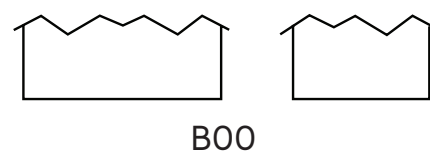





ERA part number: S56005

Technical parameter	Value
Battery	SLI Battery
ETN	5604I305I
Battery Capacity [Ah]	60 Ah
Cold Cranking Amps (CCA), EN [A]	510 A
Length [mm]	232
Width [mm]	173
Height [mm]	225
Layout	I
Terminals	I
Base hold-down	B00
Case size	D23
Weight [Kg]	14,05


Layout

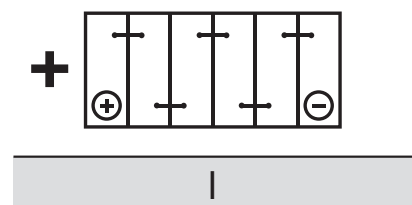

Terminals

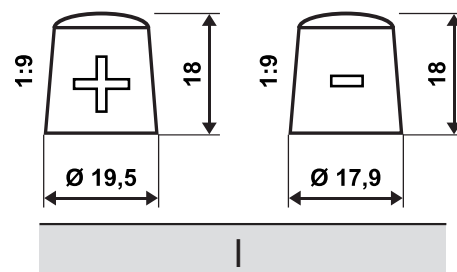

Base hold-down

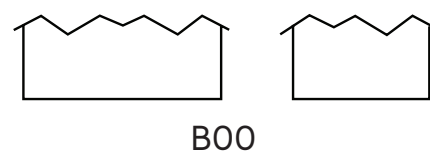





ERA part number: S565II

Technical parameter	Value
Battery	SLI Battery
ETN	5650II058
Battery Capacity [Ah]	65 Ah
Cold Cranking Amps (CCA), EN [A]	580 A
Length [mm]	230
Width [mm]	173
Height [mm]	222
Layout	0
Terminals	I
Base hold-down	Korean B0I
Case size	D23
Weight [Kg]	16,80


Layout

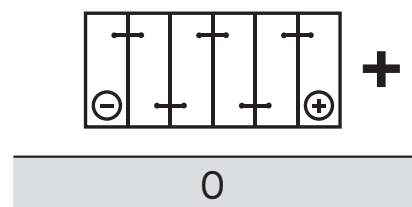

Terminals

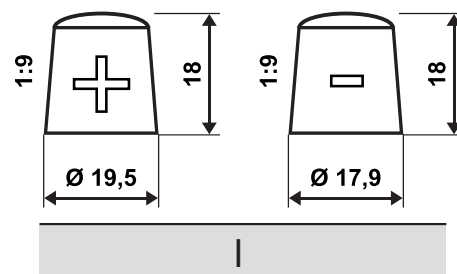

Base hold-down

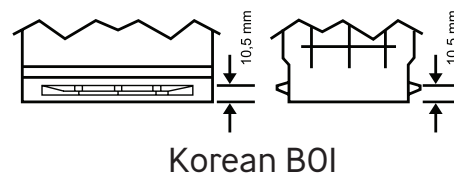





ERA part number: S568I2

Technical parameter	Value
Battery	SLI Battery
ETN	568403057
Battery Capacity [Ah]	68 Ah
Cold Cranking Amps (CCA), EN [A]	570 A
Length [mm]	278
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T6
Weight [Kg]	15,33


Layout

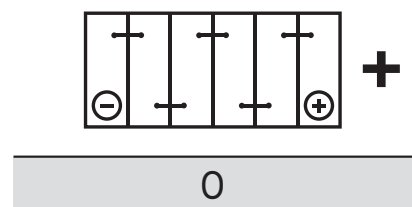

Terminals

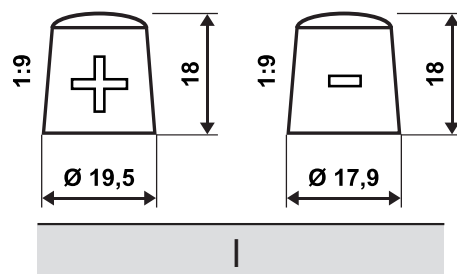

Base hold-down

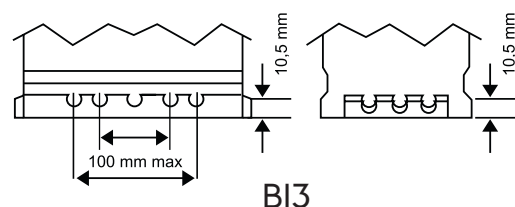





ERA part number: S568I9

Technical parameter	Value
Battery	SLI Battery
ETN	568404055
Battery Capacity [Ah]	68 Ah
Cold Cranking Amps (CCA), EN [A]	550 A
Length [mm]	259
Width [mm]	178
Height [mm]	222
Layout	0
Terminals	I
Base hold-down	BOI
Case size	D26/MIO
Weight [Kg]	17,04


Layout

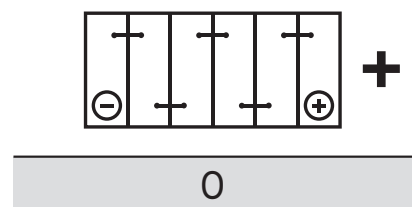

Terminals

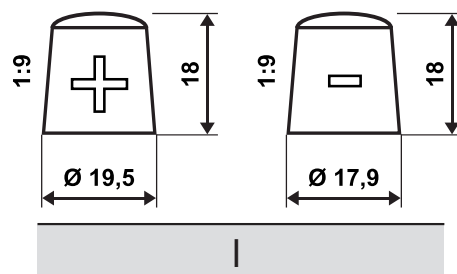

Base hold-down

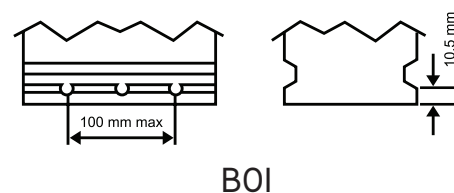





ERA part number: S56808

Technical parameter	Value
Battery	SLI Battery
ETN	568405055
Battery Capacity [Ah]	68 Ah
Cold Cranking Amps (CCA), EN [A]	550 A
Length [mm]	259
Width [mm]	178
Height [mm]	222
Layout	I
Terminals	I
Base hold-down	B0I
Case size	D26/MIO
Weight [Kg]	17,04


Layout

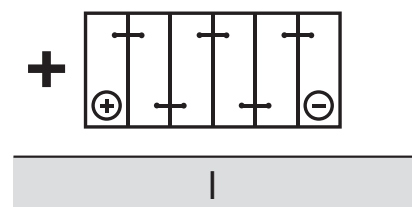

Terminals

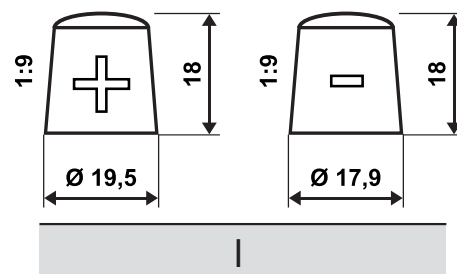

Base hold-down

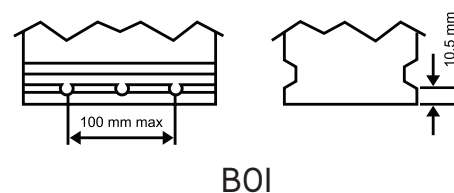





ERA part number: S57001

Technical parameter	Value
Battery	SLI Battery
ETN	570410064
Battery Capacity [Ah]	70 Ah
Cold Cranking Amps (CCA), EN [A]	640 A
Length [mm]	278
Width [mm]	175
Height [mm]	190
Layout	I
Terminals	I
Base hold-down	BI3
Case size	H6/LN3
Weight [Kg]	16,97


Layout

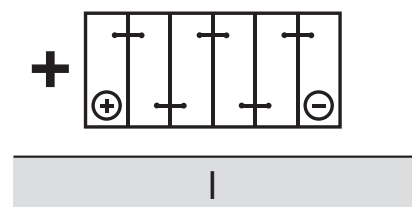

Terminals

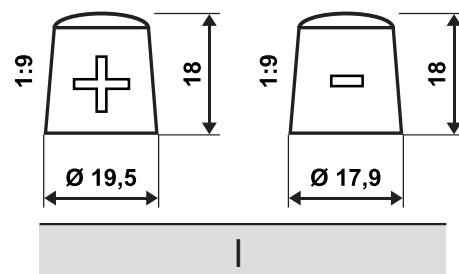

Base hold-down

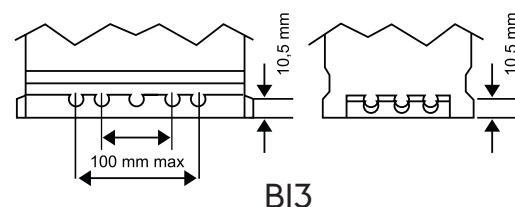





ERA part number: S57212

Technical parameter	Value
Battery	SLI Battery
ETN	572409068
Battery Capacity [Ah]	72 Ah
Cold Cranking Amps (CCA), EN [A]	680 A
Length [mm]	278
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T6/LB3
Weight [Kg]	16,80


Layout

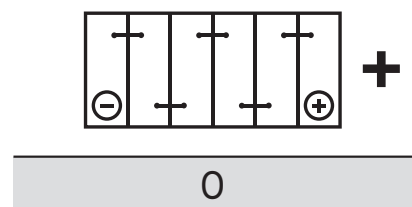

Terminals

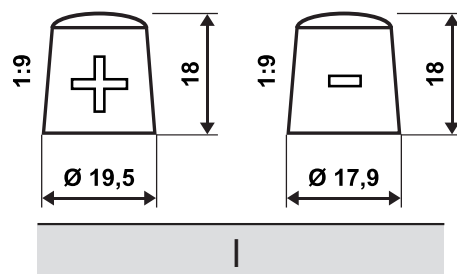

Base hold-down

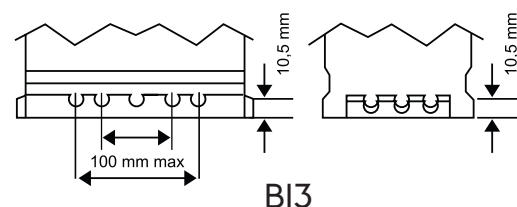





ERA part number: **S574II**

Technical parameter	Value
Battery	SLI Battery
ETN	574104068
Battery Capacity [Ah]	74 Ah
Cold Cranking Amps (CCA), EN [A]	680 A
Length [mm]	278
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H6/LN3
Weight [Kg]	18,45


Layout

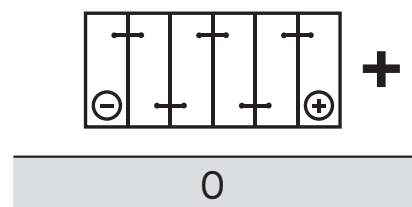

Terminals

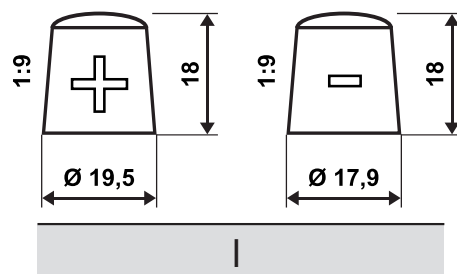

Base hold-down

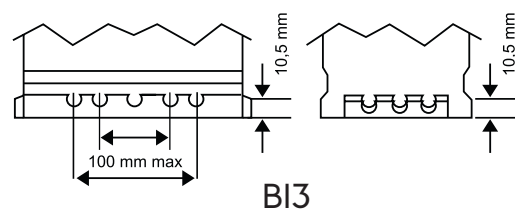





ERA part number: S57715

Technical parameter	Value
Battery	SLI Battery
ETN	577400078
Battery Capacity [Ah]	79 Ah
Cold Cranking Amps (CCA), EN [A]	725 A
Length [mm]	278
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	L3
Weight [Kg]	17,80


Layout

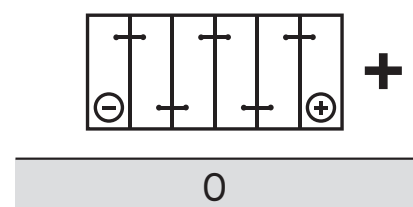

Terminals

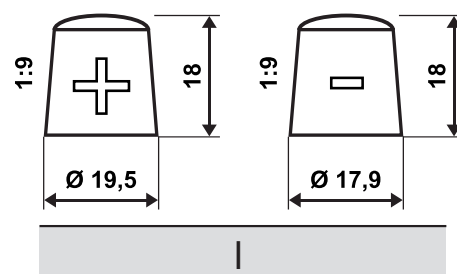

Base hold-down

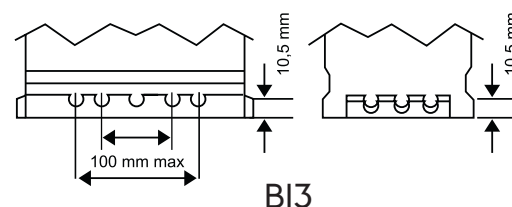





ERA part number: S58012

Technical parameter	Value
Battery	SLI Battery
ETN	580406074
Battery Capacity [Ah]	80 Ah
Cold Cranking Amps (CCA), EN [A]	740 A
Length [mm]	315
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T7/LB4
Weight [Kg]	19,08


Layout

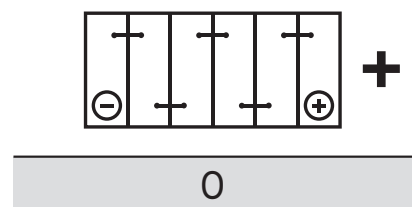

Terminals

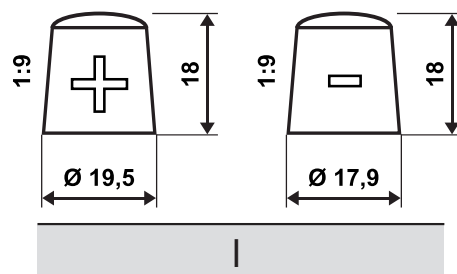

Base hold-down

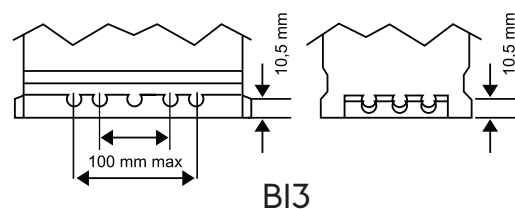





ERA part number: S583I3

Technical parameter	Value
Battery	SLI Battery
ETN	583400072
Battery Capacity [Ah]	83 Ah
Cold Cranking Amps (CCA), EN [A]	720 A
Length [mm]	353
Width [mm]	175
Height [mm]	175
Layout	0
Terminals	I
Base hold-down	BI3
Case size	T8
Weight [Kg]	19,24


Layout

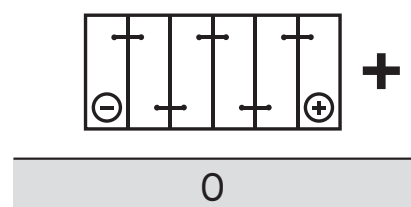

Terminals

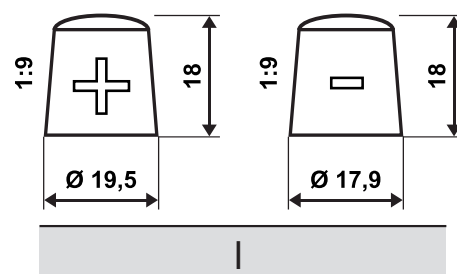

Base hold-down

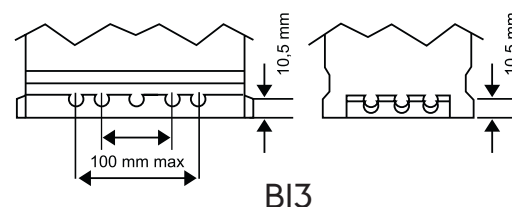





ERA part number: S59014

Technical parameter	Value
Battery	SLI Battery
ETN	590122072
Battery Capacity [Ah]	90 Ah
Cold Cranking Amps (CCA), EN [A]	720 A
Length [mm]	353
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H8
Weight [Kg]	20,34


Layout

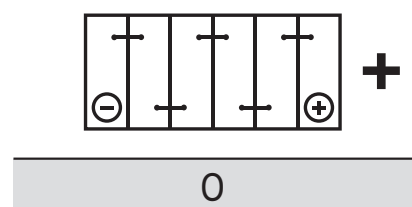

Terminals

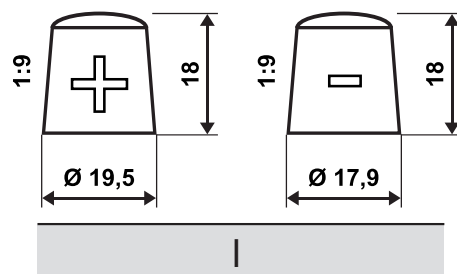

Base hold-down

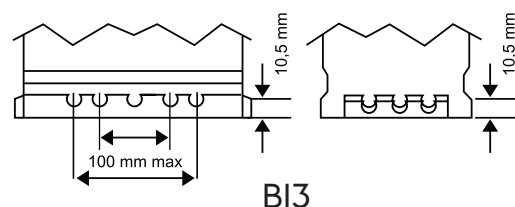





ERA part number: S59III

Technical parameter	Value
Battery	SLI Battery
ETN	59I400074
Battery Capacity [Ah]	91 Ah
Cold Cranking Amps (CCA), EN [A]	740 A
Length [mm]	305
Width [mm]	178
Height [mm]	222
Layout	0
Terminals	I
Base hold-down	B0I
Case size	D3/MII
Weight [Kg]	20,74


Layout

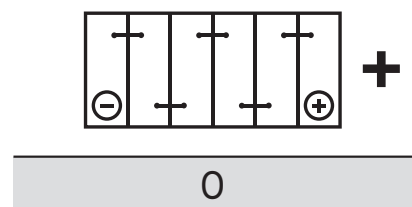

Terminals

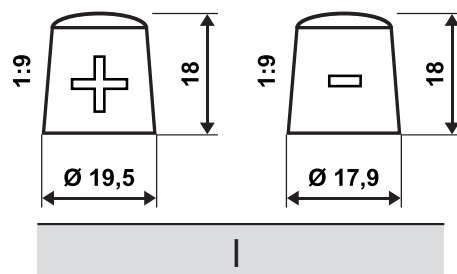

Base hold-down

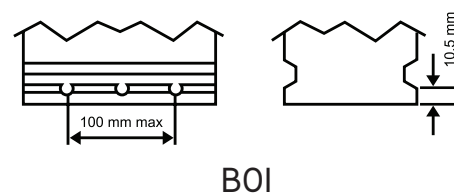





ERA part number: S59100

Technical parameter	Value
Battery	SLI Battery
ETN	591401074
Battery Capacity [Ah]	91 Ah
Cold Cranking Amps (CCA), EN [A]	740 A
Length [mm]	305
Width [mm]	178
Height [mm]	222
Layout	I
Terminals	I
Base hold-down	B0I
Case size	D3/MII
Weight [Kg]	20,74


Layout

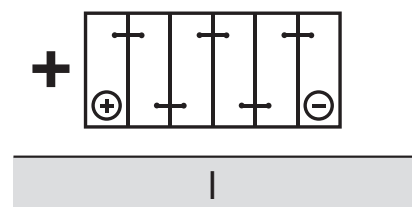

Terminals

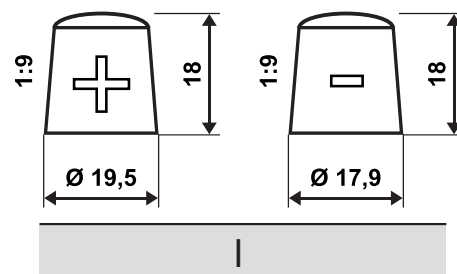

Base hold-down

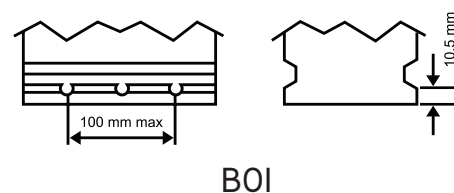





ERA part number: S59317

Technical parameter	Value
Battery	SLI Battery
ETN	593402080
Battery Capacity [Ah]	93 Ah
Cold Cranking Amps (CCA), EN [A]	800 A
Length [mm]	353
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H8/LN5
Weight [Kg]	22,20


Layout

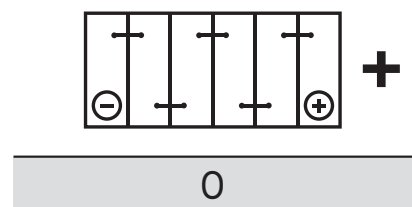

Terminals

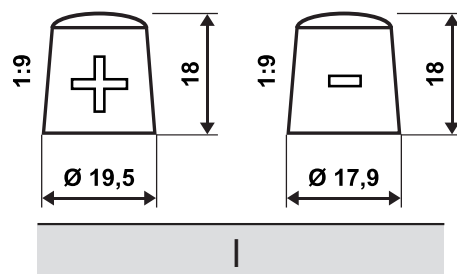

Base hold-down

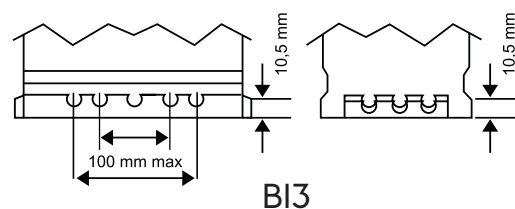





ERA part number: S59515

Technical parameter	Value
Battery	SLI Battery
ETN	595404083
Battery Capacity [Ah]	95 Ah
Cold Cranking Amps (CCA), EN [A]	830 A
Length [mm]	306
Width [mm]	173
Height [mm]	225
Layout	0
Terminals	I
Base hold-down	B0I
Case size	D3I
Weight [Kg]	19,68


Layout

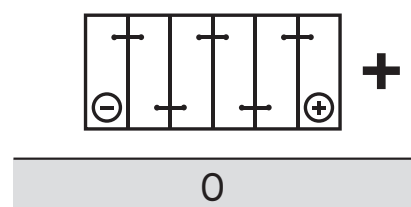

Terminals

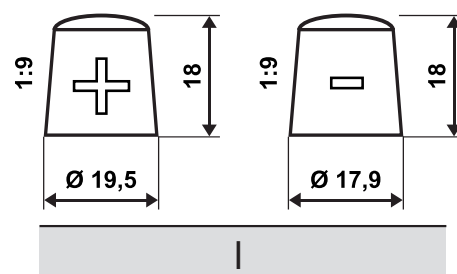

Base hold-down

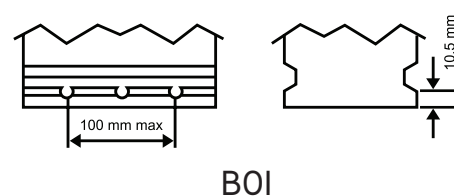





ERA part number: S59506

Technical parameter	Value
Battery	SLI Battery
ETN	595405083
Battery Capacity [Ah]	95 Ah
Cold Cranking Amps (CCA), EN [A]	830 A
Length [mm]	306
Width [mm]	173
Height [mm]	225
Layout	I
Terminals	I
Base hold-down	B0I
Case size	D3IR
Weight [Kg]	19,68


Layout

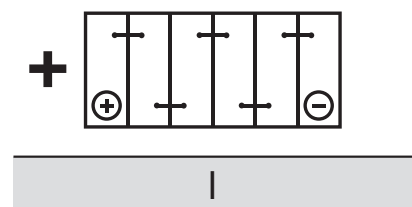

Terminals

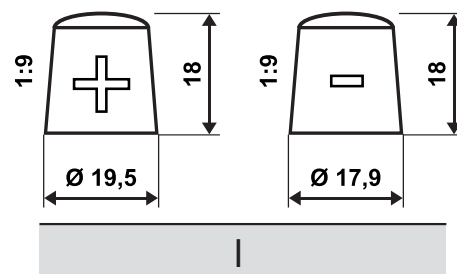

Base hold-down

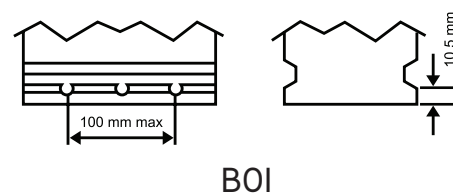





ERA part number: S60018

Technical parameter	Value
Battery	SLI Battery
ETN	600402083
Battery Capacity [Ah]	100 Ah
Cold Cranking Amps (CCA), EN [A]	830 A
Length [mm]	353
Width [mm]	175
Height [mm]	190
Layout	0
Terminals	I
Base hold-down	BI3
Case size	H8/LN5
Weight [Kg]	23,14


Layout

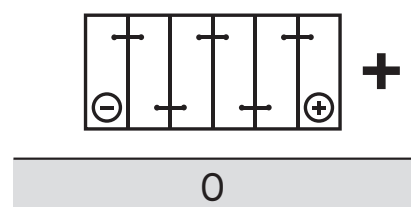

Terminals

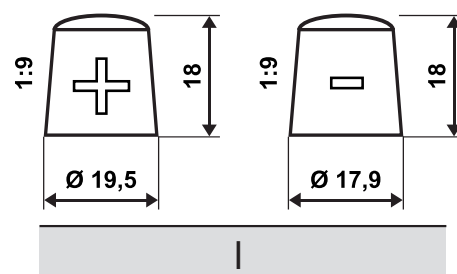

Base hold-down

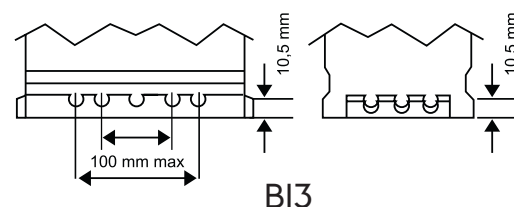





ERA part number: S60017

Technical parameter	Value
Battery	SLI Battery
ETN	600I23072
Battery Capacity [Ah]	100 Ah
Cold Cranking Amps (CCA), EN [A]	720 A
Length [mm]	313
Width [mm]	175
Height [mm]	205
Layout	0
Terminals	I
Base hold-down	BI3
Case size	GB28
Weight [Kg]	22,60


Layout

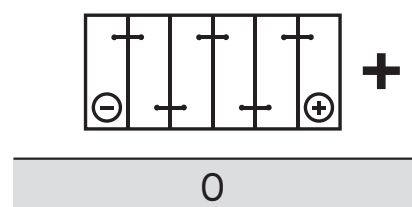

Terminals

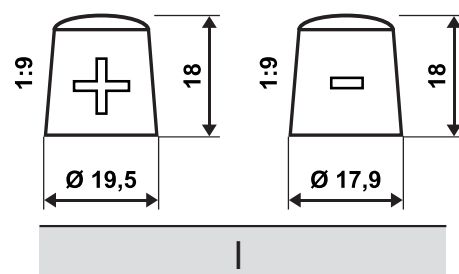

Base hold-down

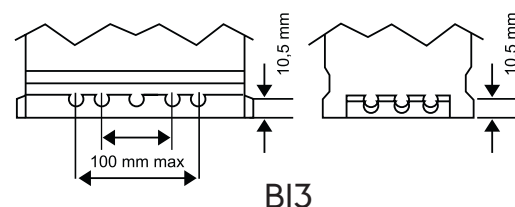





ERA part number: T61051

Technical parameter	Value
Battery	SLI Battery
ETN	610013076
Battery Capacity [Ah]	110 Ah
Cold Cranking Amps (CCA), EN [A]	760 A
Length [mm]	514
Width [mm]	175
Height [mm]	210
Layout	3
Terminals	I
Base hold-down	B03
Case size	MAC 110
Weight [Kg]	30,97


Layout

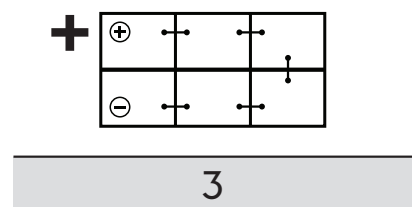

Terminals

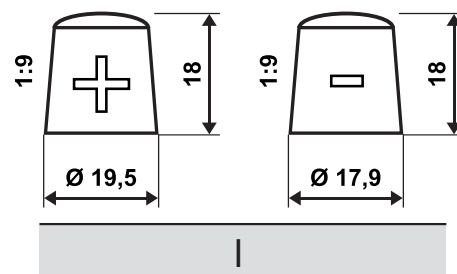

Base hold-down

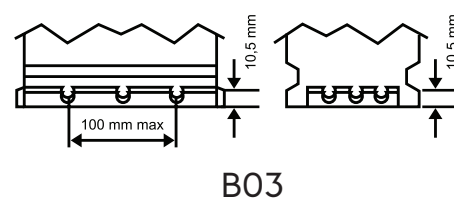





ERA part number: T61013

Technical parameter	Value
Battery	SLI Battery
ETN	610404068
Battery Capacity [Ah]	110 Ah
Cold Cranking Amps (CCA), EN [A]	680 A
Length [mm]	349
Width [mm]	175
Height [mm]	239
Layout	0
Terminals	I
Base hold-down	B01
Case size	LOT 7
Weight [Kg]	26,80


Layout

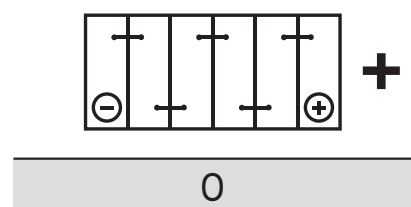

Terminals

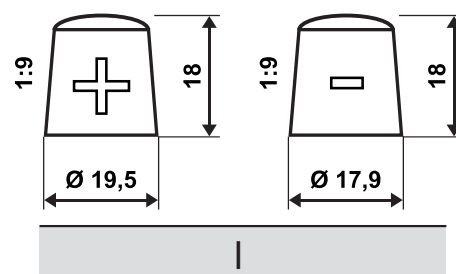

Base hold-down

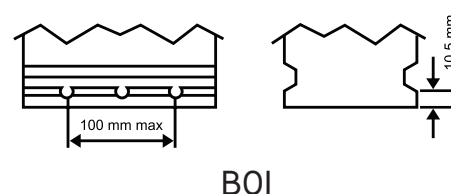




ERA part number: T62051


Technical parameter	Value
Battery	SLI Battery
ETN	620045068
Battery Capacity [Ah]	120 Ah
Cold Cranking Amps (CCA), EN [A]	680 A
Length [mm]	513
Width [mm]	189
Height [mm]	223
Layout	3
Terminals	I
Base hold-down	B00
Case size	TYP A
Weight [Kg]	33,64

Layout



3

Terminals

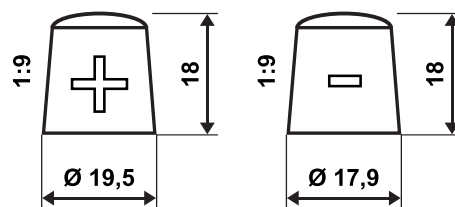

I

Base hold-down




B00




ERA part number: T62064

Technical parameter	Value
Battery	SLI Battery
ETN	620109076
Battery Capacity [Ah]	120 Ah
Cold Cranking Amps (CCA), EN [A]	760 A
Length [mm]	510
Width [mm]	175
Height [mm]	228
Layout	4
Terminals	I
Base hold-down	B03
Case size	MAC 120
Weight [Kg]	35,12


Layout

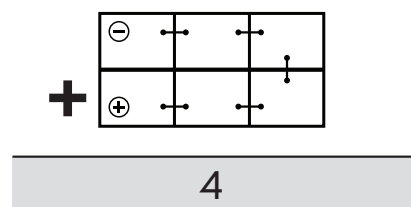

Terminals

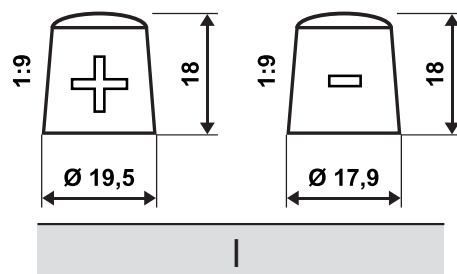

Base hold-down

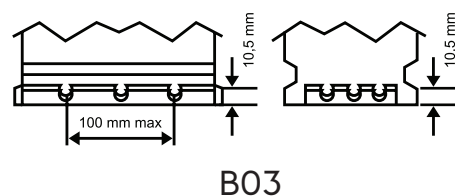





ERA part number: T62010

Technical parameter	Value
Battery	SLI Battery
ETN	6200I0087
Battery Capacity [Ah]	120 Ah
Cold Cranking Amps (CCA), EN [A]	870 A
Length [mm]	349
Width [mm]	175
Height [mm]	235
Layout	0
Terminals	I
Base hold-down	B0I
Case size	D02
Weight [Kg]	27,50


Layout

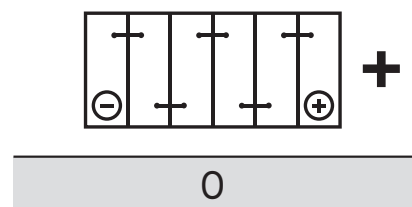

Terminals

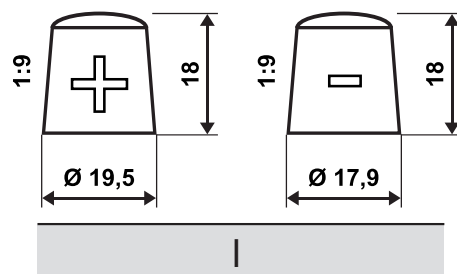

Base hold-down

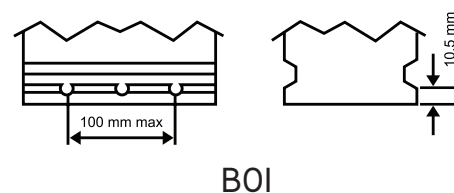





ERA part number: T64053

Technical parameter	Value
Battery	SLI Battery
ETN	640036076
Battery Capacity [Ah]	140 Ah
Cold Cranking Amps (CCA), EN [A]	760 A
Length [mm]	513
Width [mm]	190
Height [mm]	217
Layout	3
Terminals	I
Base hold-down	B03
Case size	TYP A/MBI4
Weight [Kg]	34,69


Layout

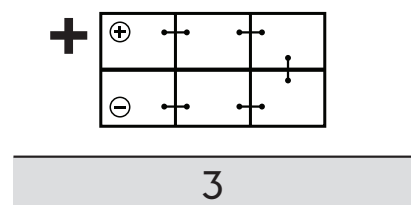

Terminals

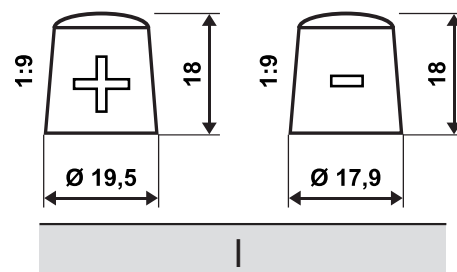

Base hold-down

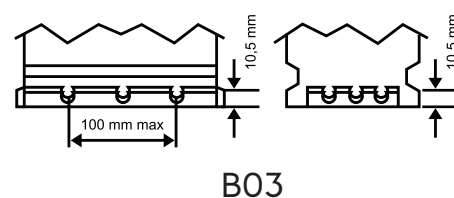





ERA part number: T64052

Technical parameter	Value
Battery	SLI Battery
ETN	640I03080
Battery Capacity [Ah]	140 Ah
Cold Cranking Amps (CCA), EN [A]	800 A
Length [mm]	513
Width [mm]	189
Height [mm]	223
Layout	3
Terminals	I
Base hold-down	B00
Case size	TYP A
Weight [Kg]	34,69


Layout

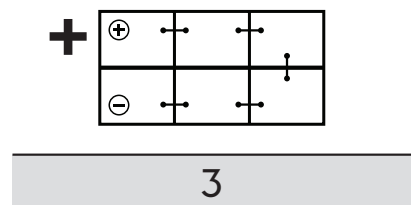

Terminals

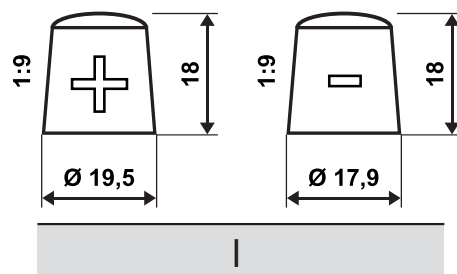

Base hold-down

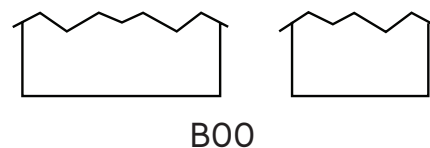





ERA part number: T67054

Technical parameter	Value
Battery	SLI Battery
ETN	670043100
Battery Capacity [Ah]	170 Ah
Cold Cranking Amps (CCA), EN [A]	1 000 A
Length [mm]	513
Width [mm]	223
Height [mm]	223
Layout	3
Terminals	I
Base hold-down	B00
Case size	TYP B
Weight [Kg]	43,93


Layout

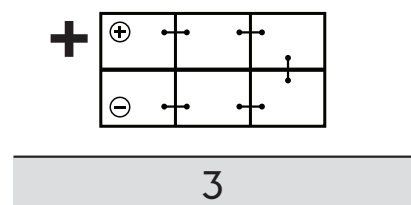

Terminals

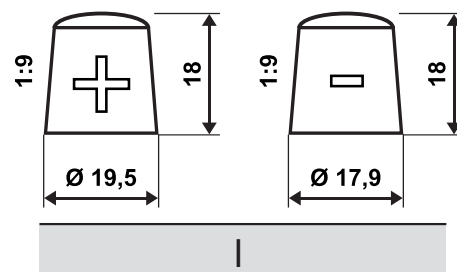

Base hold-down

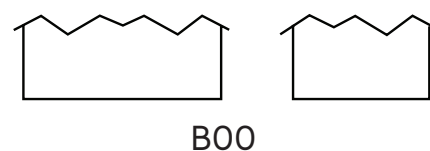





ERA part number: T68055

Technical parameter	Value
Battery	SLI Battery
ETN	680032100
Battery Capacity [Ah]	180 Ah
Cold Cranking Amps (CCA), EN [A]	1 000 A
Length [mm]	513
Width [mm]	223
Height [mm]	223
Layout	3
Terminals	I
Base hold-down	B00
Case size	TYP B
Weight [Kg]	43,93


Layout

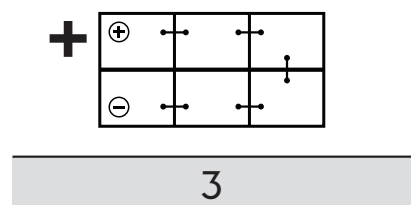

Terminals

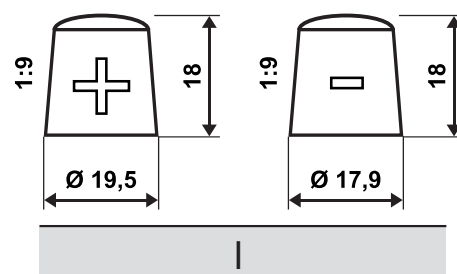

Base hold-down

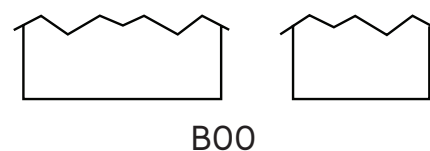





ERA part number: T70056

Technical parameter	Value
Battery	SLI Battery
ETN	700038105
Battery Capacity [Ah]	200 Ah
Cold Cranking Amps (CCA), EN [A]	1 050 A
Length [mm]	518
Width [mm]	273
Height [mm]	242
Layout	3
Terminals	I
Base hold-down	B00
Case size	C
Weight [Kg]	59,80


Layout

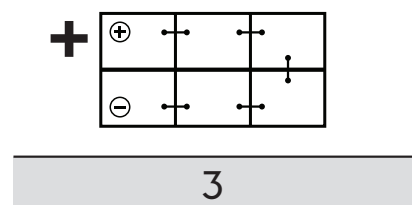

Terminals

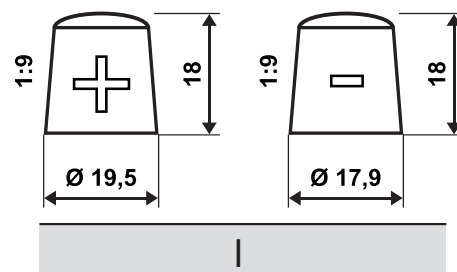

Base hold-down

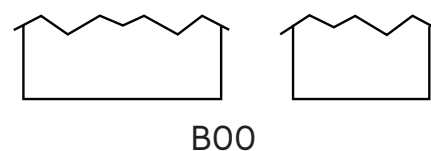





ERA part number: T72557

Technical parameter	Value
Battery	SLI Battery
ETN	725012115
Battery Capacity [Ah]	225 Ah
Cold Cranking Amps (CCA), EN [A]	1150 A
Length [mm]	518
Width [mm]	273
Height [mm]	240
Layout	3
Terminals	1
Base hold-down	B00
Case size	TYP C/MI6
Weight [Kg]	55,67

Layout

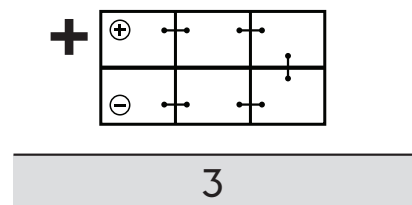

Terminals

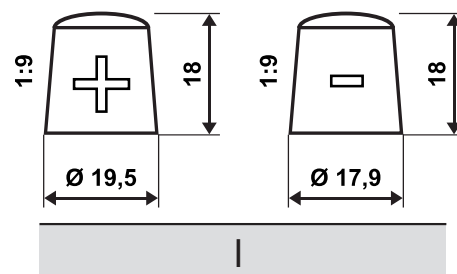

Base hold-down

